





Environmentally, Economically Smart 800W LED Technology

- ■LED 800W is equivalent to 1000W Metal Halide Lamp
- ■No Restrike Time, Instant start / restart
- ■3-Stage Dimming Control (800w/600w/400w)



800W LED Technology

LED Features

Immediate Strike

Provide fullest brightness without waiting

Shock Resistant

Durable compared to normal bulb

Safe

LED holds less heat, convenient operation process

Long Life Hours

Up to 40,000 hours of operating life per bulb

Application



Maintenance



Investigation




Event



Construction Site


Brightness



Message Strip Message Strips fit on both sides of the balloon. ROAD WORK AHEAD FLAGGER AHEAD STOPHERE



Dimensions(mm)

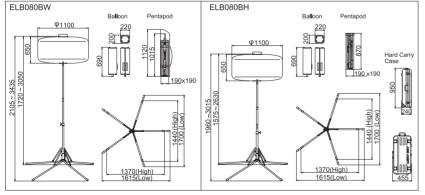

Specification

Light Tower	Model		odel	ELB080BW	ELB080BH
		Volta	ge (V)	AC 90~240	
		Freque	ncy (Hz)	50/60	
		Curre	ent (A)	3.6(AC230V,800W)	
		Type		LED	
	Lamp	Dimming Control		3 Stage Dimming :800W/600W/400W	
		Total Luminous Flux (Im)		110000(800W)/90000(600W)/67000(400W)	
		Temperature (°C)		- 10 ~ 40	
	Mast	Mast		Telescopic System (with Air-Assisted)	
	ast	Mast Operating		Hand Operated	
		1st Level (L×W×H) (mm)		1615×1700×1720~3050	1615×1700×1575~2630
	Dimension	2nd Level	(L×W×H) (mm)	1370×1440×2105~3435	1370×1440×1960~3015
	en	Storage (L×W×H) (mm)	Balloon	200×220×690	
	Sio.		Pentapod	190×190×1015	190×190×870
			Carry Case	220×220×1120	240×455×950
	8	Ba ll oon (kg)		11.2	
	Weight	Pentapod (kg)		10.7	10.5
	Ħ	Carry Case (kg)		0.7	8.9
		Total We	eight (kg)	22.6	30.6
	Appropriate Generator			850W and above	

Features and equipment specifications are subject to change without notice.